




64.95 EUR  
incl. 19% VAT, plus shipping

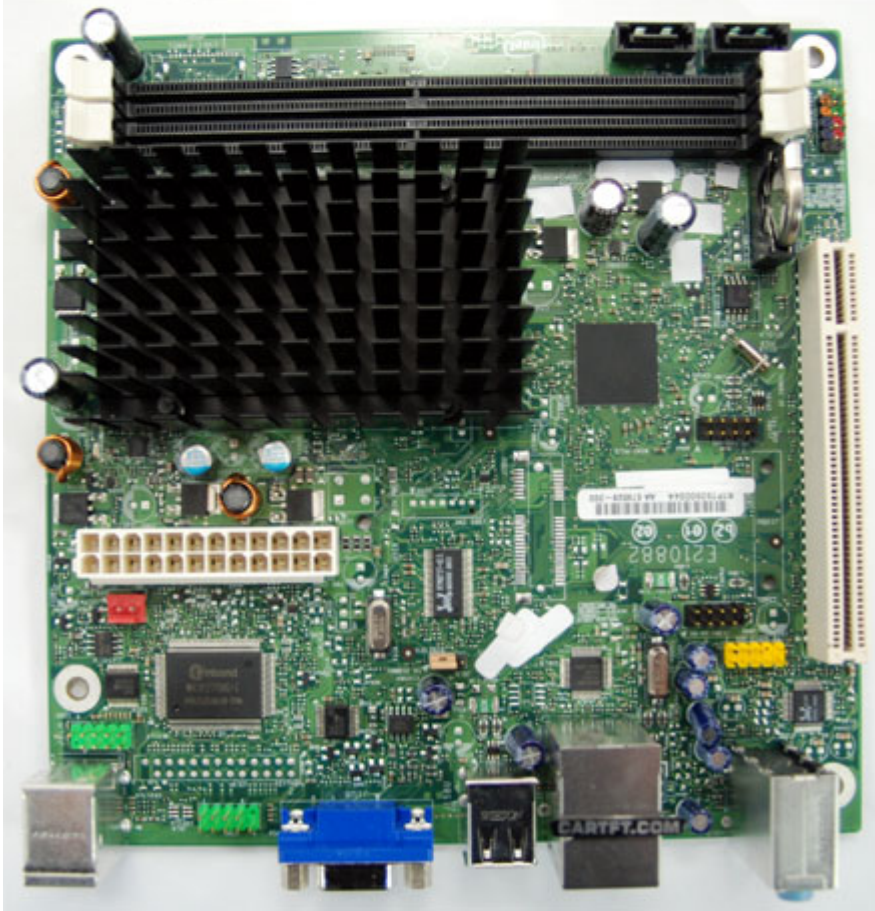

Support: [Review \[DE\]](#) | [Review \[EN\]](#)

### Specifications

<a href="#">CPU</a>	Intel Atom D410 1x1.66Ghz	<a href="#">RAM</a>	2x DDR-II 667/800
<a href="#">Graphic</a>	Intel GMA 3150	<a href="#">Audio</a>	Realtek HD Codec
<a href="#">Formfactor</a>	ITX (17x17cm)	<a href="#">Base</a>	Intel ITX












### Interface

<a href="#">USB</a>	8x USB 2.0	<a href="#">LAN</a>	1x 10/100
<a href="#">Firewire</a>	--	<a href="#">Parallel</a>	--
<a href="#">IDE/SATA</a>	2x SATA	<a href="#">Serial</a>	2x

## Features

<a href="#">TV-Out</a>		<a href="#">Passive cooling</a>	
<a href="#">PCI</a>	■	<a href="#">PCI-Express</a>	
<a href="#">Mini-PCI</a>		<a href="#">PCMCIA</a>	
<a href="#">IDE</a>		<a href="#">SATA</a>	■
<a href="#">DVI</a>		<a href="#">CPU changeable</a>	
<a href="#">800x480 Resolution</a>		<a href="#">Compact Flash</a>	

## Compatible enclosures

	<a href="#">CFI A-7879 Gehäuse (4x 3.5" NAS, 1x 2.5", Hot-Plug, 1x PCI, 200W ) *new*</a>		<a href="#">Casetronic Travla C137</a>
	<a href="#">Casetronic Travla C138 (not in stock until 15.02.2012)</a>		<a href="#">M300 Enclosure (1x PCI)</a>
	<a href="#">M300-LCD Enclosure (1x PCI) [Delivery time on request]</a>		<a href="#">M350 Mini-ITX enclosure</a>
	<a href="#">M4-BOX</a>		<a href="#">MHero-L-B enclosure (1x PCI, Slimline ODD)</a>
	<a href="#">MHero-L-R enclosure (1x PCI, Slimline ODD) *new*</a>		<a href="#">MHero-S-B enclosure *new*</a>
	<a href="#">MHero-S-R enclosure *new*</a>		<a href="#">Morex Case 3300</a>
	<a href="#">Morex Case 3310</a>		<a href="#">Morex Case 3777 black</a>
	<a href="#">Morex Case Cubid CB2699 beige</a>		<a href="#">Morex Case Cubid CB2699 black</a>
	<a href="#">Morex Case Cubid CB3677 black</a>		<a href="#">Morex Case Cubid CB3688 black</a>
	<a href="#">VoomPC (perfect for M1-ATX/M2-ATX) [Black Edition]</a>		<a href="#">VoomPC (perfect for M1-ATX/M2-ATX) [Black Edition] (with TFT power connector)</a>

The D410PT as well as the D510MO offer passive cooling and hide on the one hand a -single Core Atom processor (D410) and on the other hand a Dual Core Atom processor (D510 – also used in numerous new netbooks) of the newest generation.

In the area of power consumption (~30 watts) the new mainboards range within the low, classic Intel Atom level. The major advantage of the new mainboard ist he possibility to utilize the 24 pin ATX jack, which makes the use of an additional P4 connector unnecessary.

As with the other mainboard generations, Intel again, focuses on the extension possibilities. Therefore, both mainboards offer a willingly utilized PCI slot, and the D510MO additionally offers a Mini PCIexpress socket and a LPT extension slot. With these

possibilities up their sleeve, with minimum effort they offer variable fields of application.

Name	D410PT
Form Factor	Mini-ITX Mainboard
CPU	Intel Atom D410 @ 1x 1.66GHz (Silverthorne 45nm)
Chipset	Intel NM10 Express
L2 Cache	512kb
Graphics	Intel GMA 3150
Memory	2x DDR2 667/800 RAM (bis zu 4GB)
Power	24 Pin ATX
Connectors (rear)	<ul style="list-style-type: none"> <li>- 1x PS/2</li> <li>- 1x D-SUB15 (VGA)</li> <li>- 4x USB 2.0</li> <li>- 1x LAN 10/100 MBit</li> <li>- 3x Sound (Line Out, Line In, Microphone)</li> </ul>
Audio	Realtek High Definition Audio
Connectors (internal)	<ul style="list-style-type: none"> <li>- PCI</li> <li>- Audio</li> <li>- 4x USB</li> <li>- 2x SATA</li> <li>- 2x RS232</li> </ul>
Included	<ul style="list-style-type: none"> <li>- D410PT Mainboard (with 1x 1.66Ghz Atom CPU)</li> <li>- I/O ATX rear plate</li> <li>- 2x SATA cable</li> <li>- Quickstart-Guide</li> <li>- Drivers CD</li> </ul>

**Note :** This mainboard does not fit into Voom-2, because of the big heatsink.