









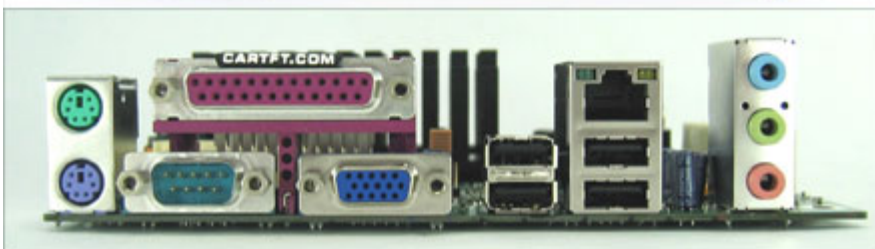

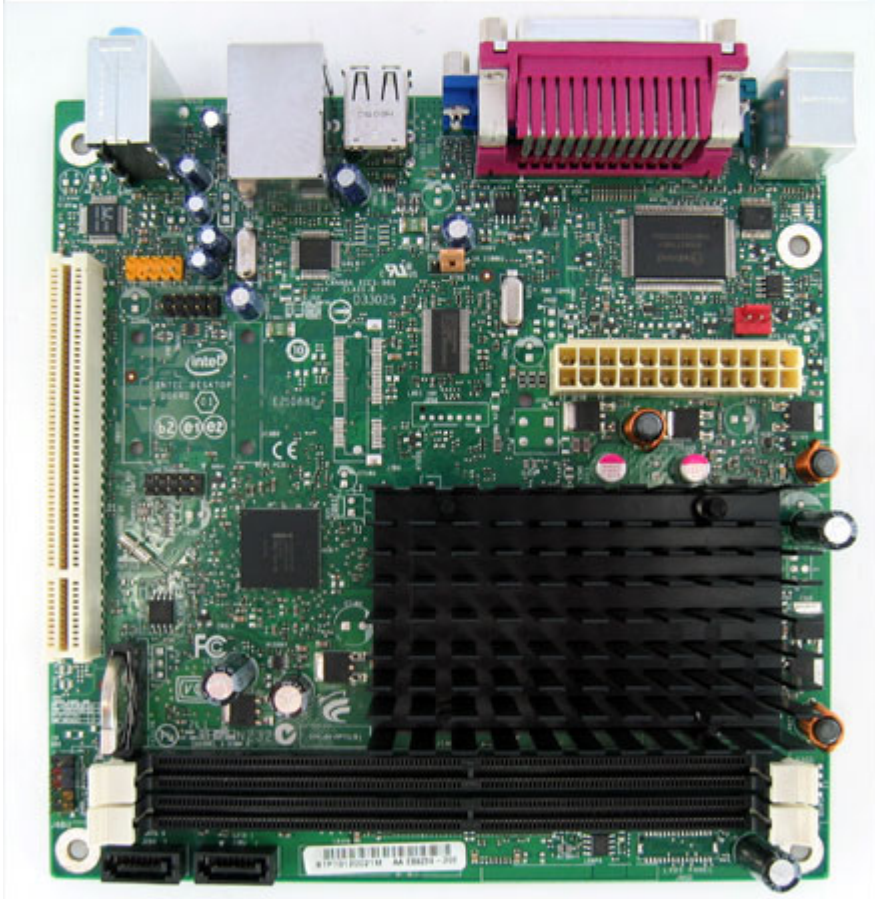











999.00 EUR
incl. 19% VAT, plus shipping



Specifications

CPU	Intel Atom D410 1x1.66Ghz	RAM	2x DDR-II 667/800
Graphic	Intel GMA 3150	Audio	Realtek HD Codec

<u>Formfactor</u>	ITX (17x17cm)	<u>Base</u>	Intel ITX
Interface			
<u>USB</u>	8x USB 2.0	<u>LAN</u>	1x 10/100
<u>Firewire</u>	--	<u>Parallel</u>	1x
<u>IDE/SATA</u>	2x SATA	<u>Serial</u>	1x
Features			
<u>TV-Out</u>		<u>Passive cooling</u>	■
<u>PCI</u>	■	<u>PCI-Express</u>	
<u>Mini-PCI</u>		<u>PCMCIA</u>	
<u>IDE</u>		<u>SATA</u>	■
<u>DVI</u>		<u>CPU changeable</u>	
<u>800x480 Resolution</u>		<u>Compact Flash</u>	
Compatible enclosures			
	Casetronic Travla C137		Casetronic Travla C138
	M300 Enclosure (1x PCI)		M300-LCD Enclosure (1x PCI)
	M350 Mini-ITX enclosure		M4-BOX
	MHero-L-B enclosure (1x PCI, Slimline ODD)		MHero-L-R enclosure (1x PCI, Slimline ODD) *new*
	MHero-S-B enclosure *new*		MHero-S-R enclosure *new*
	Morex Case 3300		Morex Case 3310
	Morex Case Cubid CB2699 beige		Morex Case Cubid CB2699 black
	Morex Case Cubid CB3677 black		Morex Case Cubid CB3688 black
	VoomPC (perfect for M1-ATX/M2-ATX) [Black Edition]		VoomPC (perfect for M1-ATX/M2-ATX) [Black Edition] (with TFT power connector)

Differences to D410PT-model : 1x RS232 and 1x Parallel on mainboard rear side.

The D410PT as well as the D510MO offer passive cooling and hide on the one hand a -single Core Atom processor (D410) and on the

other hand a Dual Core Atom processor (D510 – also used in numerous new netbooks) of the newest generation.

In the area of power consumption (~30 watts) the new mainboards range within the low, classic Intel Atom level. The major advantage of the new mainboard ist he possibility to utilize the 24 pin ATX jack, which makes the use of an additional P4 connector unnecessary.

As with the other mainboard generations, Intel again, focuses on the extension possibilities. Therefore, both mainboards offer a willingly utilized PCI slot, and the D510MO additionally offers a Mini PCIeexpress socket and a LPT extension slot. With these possibilities up their sleeve, with minimum effort they offer variable fields of application.

Name	D410PTL
Form Factor	Mini-ITX Mainboard
CPU	Intel Atom D410 @ 1x 1.66GHz (Silverthorne 45nm)
Chipset	Intel NM10 Express
L2 Cache	512kb
Graphics	Intel GMA 3150
Memory	2x DDR2 667/800 RAM (bis zu 4GB)
Power	24 Pin ATX
Connectors (rear)	<ul style="list-style-type: none"> - 1x RS232 - 1x Parallel - 1x PS/2 - 1x D-SUB15 (VGA) - 4x USB 2.0 - 1x LAN 10/100 MBit - 3x Sound (Line Out, Line In, Microphone)
Audio	Realtek High Definition Audio
Connectors (internal)	<ul style="list-style-type: none"> - PCI - Audio - 4x USB - 2x SATA
Included	<ul style="list-style-type: none"> - D410PT Mainboard (with 1x 1.66Ghz Atom CPU) - I/O ATX rear plate - 2x SATA cable - Quickstart-Guide - Drivers CD

Note : This mainboard does not fit into Voom-2, because of the big heatsink.