




999.00 EUR  
incl. 19% VAT, plus shipping

- NVIDIA Chipset !
- GeForce 8200 GFX !

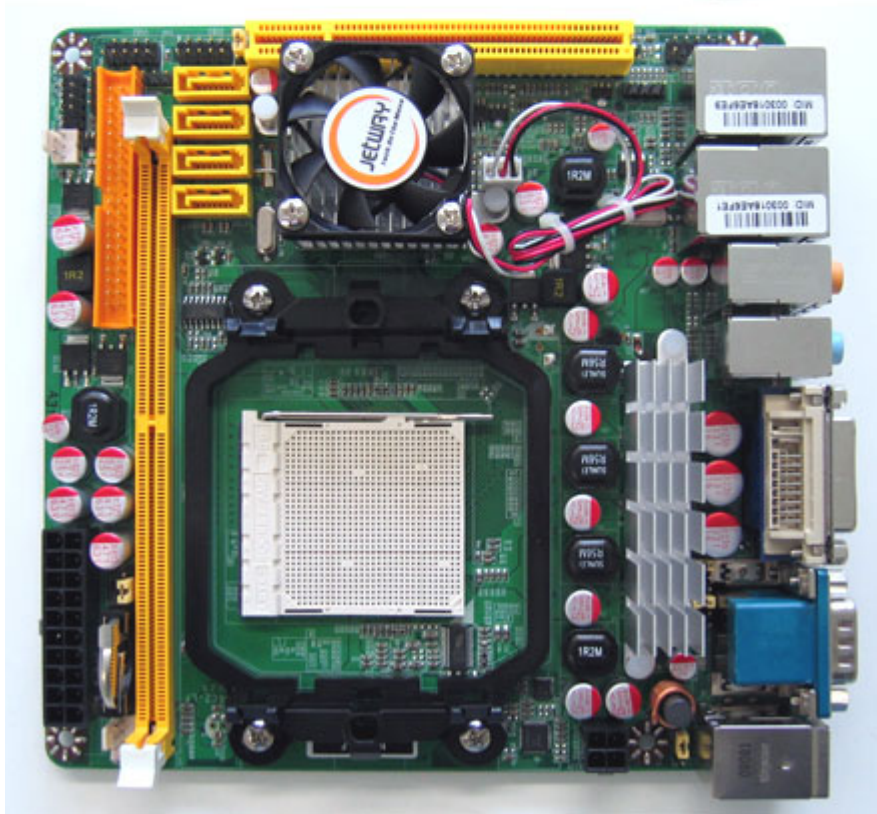

Support: [Power Consumption](#)

### Specifications

<a href="#">CPU</a>	AMD AM2	<a href="#">RAM</a>	1x DDR-II 400/533/677/800
<a href="#">Graphic</a>	GeForce 8200	<a href="#">Audio</a>	ALC883 6-Channel Audio CODEC
<a href="#">Formfactor</a>	ITX (17x17cm)	<a href="#">Base</a>	

### Interface

<a href="#">USB</a>	10x USB2.0	<a href="#">LAN</a>	2x 10/100/1000
---------------------	------------	---------------------	----------------

<a href="#">Firewire</a>	--	<a href="#">Parallel</a>	--
<a href="#">IDE/SATA</a>	2x IDE, 4x SATA	<a href="#">Serial</a>	2x

### Features

<a href="#">TV-Out</a>		<a href="#">Passive cooling</a>	
<a href="#">PCI</a>	■	<a href="#">PCI-Express</a>	
<a href="#">Mini-PCI</a>		<a href="#">PCMCIA</a>	
<a href="#">IDE</a>	■	<a href="#">SATA</a>	■
<a href="#">DVI</a>	■	<a href="#">CPU changeable</a>	■
<a href="#">800x480 Resolution</a>		<a href="#">Compact Flash</a>	

### Compatible enclosures



[M300 Enclosure \(1x PCI\)](#)



[M350 Mini-ITX enclosure](#)



[M4-BOX](#)



[MHero-L-B enclosure \(1x PCI, Slimline ODD\)](#)



[MHero-L-R enclosure \(1x PCI, Slimline ODD\) \\*new\\*](#)



[MHero-S-B enclosure \\*new\\*](#)



[MHero-S-R enclosure \\*new\\*](#)



[Morex Case 3777 black](#)



[Morex Case Cubid CB2699 beige](#)



[Morex Case Cubid CB2699 black](#)



[Morex Case Cubid CB3677 black](#)



[Morex Case Cubid CB3688 black](#)



[VoomPC \(perfect for M1-ATX/M2-ATX\) \[Black Edition\]](#)



[VoomPC \(perfect for M1-ATX/M2-ATX\) \[Black Edition\] \(with TFT power connector\)](#)



[VoomPC-2 \(perfect for M1-/M2-ATX\) \[Black Edition\]](#)



[VoomPC-2 \(perfect for M1-/M2-ATX\) \[Black Edition\] \(with TFT power connector\)](#)

JNC62K (alias J6C2)

- NVIDIA NF-8200 (MCP78S) Chipset
- Support AMD socket AM2/AM2+ Quad Core Opteron™ & Phenom™
- Integrated GeForce 8200 GFX Core Processor
- Support HTT 3000Mhz
- Support 4 SATAII devices with RAID0, 1, 0+1, 5, JBOD
- Dual Gigabit LAN support, PXE support
- Support Blu-Ray and HD-DVD, H.264, VC1 and MPEG2
- Audio over DVI port
- 17 x 17CM Mini-ITX Form Factor

---

Form Factor	Mini-ITX 170 mm x 170 mm
CPU	Socket AMD AM2 HTT 3000MHz AMD Opteron™ & Phenom™ With HyperTransport Technology
Memory	1 * 240-pin DIMM socket for unbuffered Dual DDR2 800 SDRAM up to 2GB
Chipset	NVIDIA NF-8200 (MCP78S) Single Chipset
PCI enhanced IDE	2 * Ultra DMA 133/100 / 66 IDE Devices Support
Serial ATA Interface	4 * Serial ATA2 Devices with RAID 0, 1, 0+1, 5, and JBOD - Integrated NVIDIA GeForce Series DirectX 10 Graphics Processor - Integrated 300MHz DAC for external Desktop Displays - Full HD-DVD and BluRay Video Decode - Full bitrate H.264, VC1 and MPEG2 Video Decode - Full nView® Multi-Display technology capability, with Two independent display controllers.
VGA Interface	Share Memory up to 512MB
Video Memory	ALC883 6-Channel Audio CODEC (TBD)
Audio Interface	Realtek RTL8211B PHY Gigabit Ethernet LAN
LAN Interface	Realtek RTL8111C PCI-E Gigabit Ethernet LAN
Extended Interface	1 * 32-bit PCI Slot 2 * High Speed USB Connectors @ 480 Mbit / s for 4 USB 2.0 Ports
Internal I/O Port	1 * CPU Smart Fan, 2 * DC Fan Connectors 1 * CD / AUX Audio in & SPEAK Out 1 * SPDIF
BIOS	Award 8 MB Flash ROM 6 * High Speed USB Connectors @ 480 Mbit / s 1 * DVI-I Port (with Audio) 1 * D-Sub 15-pin VGA Connector
External I/O Port	2 * RJ45 Connectors 2 * Audio I / O 1 * PS/2 Mouse & Keyboard 2 * RS232 Port (COM Port) 1 * 12V 4-Pin ATX Power Connector 1 * 20Pin ATX Power Connector
Power Requirement	
Dimension	170mm x 170mm