


389.00 EUR
 incl. 19% VAT, plus [shipping](#)

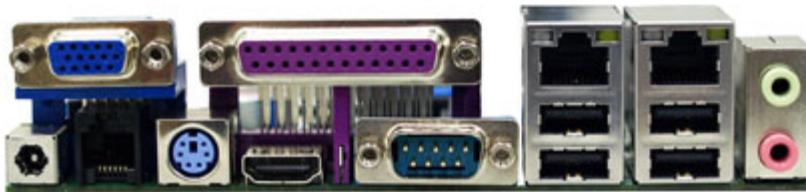

- INTEL® Celeron 1037U Processor + NM70 Chipset
- Support 1 * DDR3 1600/1333MHz Single CH up to 8GB
- Support 1 * Serial ATAII (3Gb/s) & 1 * Serial ATAIII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 2-CH
- 1 * 24 bits Dual Channel LVDS header
- Supports 2 * Realtek RT8111F Gigabit LAN
- Support 6 * COM ports (COM1 support RS232/422/485)
- 6 * COM support +5V/+12V
- Support Watch dog Technology
- Provides AT mode power
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

CPU	• INTEL® Celeron 1037U Dual Core Processor (1.8GHz)
Chipset	• INTEL®NM70 Express chipset
Memory	• 1 * DDR3 1600/1333MHz Single CH SO-DIMM up to 8GB
Expansion Slots	• 1 * PCI -E x 1 slot • 1 * half size Mini PCI-E socket
Storage	• 1 * Serial ATA2 3Gb/s & 1 * Aerial ATA3 6Gb/s connectors • 1 * full size mSATA socket

• Audio	• Realtek ALC662 6-Channel HD Audio
• Ethernet LAN	• 2 * RTL8111F PCI-E Gigabit LAN
• LVDS	• Onboard 1 * 24-bits Dual channel connector
• USB	• Embedded 6 * USB 2.0/1.1
• Special Features	• Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog
• Rear Panel I/O	• 4 * USB 2.0/1.1 ports • 2 * RJ-45 ports • 2 * Audio I/O ports (MIC and Line-out) • 1 * VGA port • 1 * Parallel port • 1 * HDMI port • 1 * COM port (COM1 for RS232/422/485) • 1 * PS/2 • 1 * RJ-11 port • 1 * 12V DC in jack
• Internal I/O	• 1 * USB 2.0/1.1 headers for 2 USB 2.0 ports • 2 * NB / Chassis Fan connectors • 5 * COM headers • 1 * LVDS headers /1 * Inverter headers • 1 * AUDIO header • 1 * Chassis Intrusion
• BIOS	• AMI 32MB UEFI DIP Flash ROM
• Functional	• POS Machine
• Packing	• Color Box Dimension ■ 200(W) x 200(D) x 70(H)mm
• Certificate	• CE, FCC, RoHS
• Temperature	• Operating within 0~40 centigrade • Storage within -20-85 centigrade
• Form Factor	• Mini ITX Form Factor(17cmx17cm)