
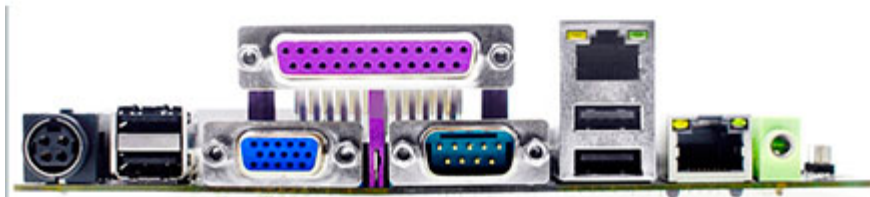


999.00 EUR  
incl. 19% VAT, plus [shipping](#)

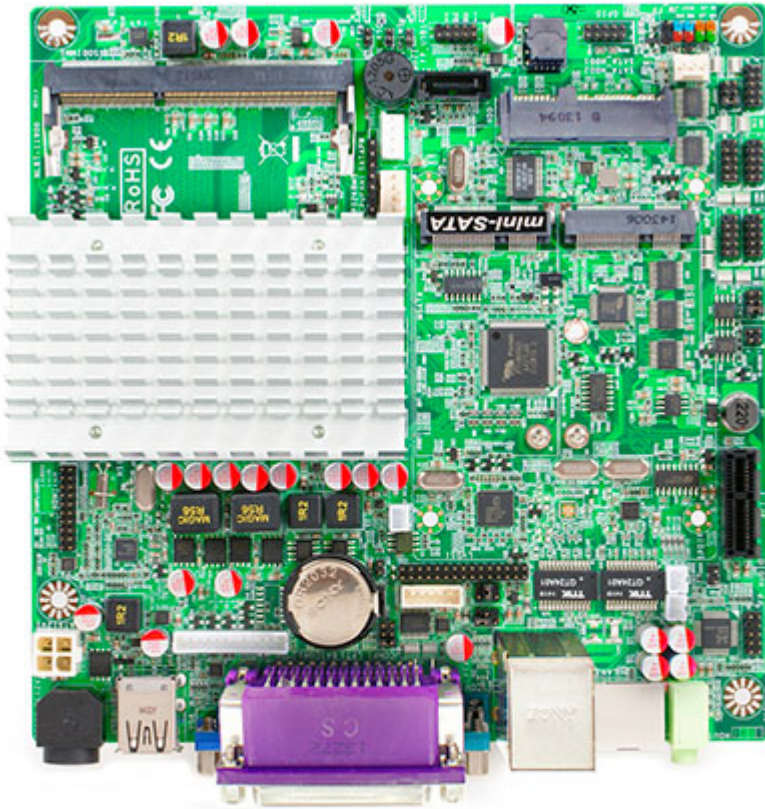

- Intel® Celeron™ J1900 (2.0 GHz) quad-core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 2\*PCI Express Gigabit LAN
- Support Power Onboard(12V)
- Onboard 1\*MiniPCI-E connector
- Onboard 1 \*M- SATA connector
- 2 Phase CPU Power Support
- Support Slim Fan design
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

<b>CPU-Chipset</b>	<ul style="list-style-type: none"> <li>• INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor</li> <li>• 2 Phase CPU Power Support</li> </ul>
<b>I.O Chipset</b>	<ul style="list-style-type: none"> <li>• Fintek F71869</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 1*SO-DIMM slot</li> <li>• Support DDR3L 1333</li> <li>• Max. capacity of system memory up to 8GB</li> </ul>
<b>Expansion Slots</b>	<ul style="list-style-type: none"> <li>• 1 * MiniPCI-E connector</li> <li>• 1* PCIe1 slot</li> </ul>

<b>Storage</b>	<ul style="list-style-type: none"> <li>• 1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin)</li> <li>• 1 * <a href="#">M-SATA Connector</a></li> </ul>
<b>Audio</b>	<ul style="list-style-type: none"> <li>• ALC887 Audio CODEC</li> <li>• HD Audio CODEC</li> </ul>
<b>Ethernet LAN</b>	<ul style="list-style-type: none"> <li>• Realtek® RTL8111G Chip</li> <li>• 2*PCI Express Gigabit LAN</li> </ul>
<b>LVDS</b>	<ul style="list-style-type: none"> <li>• Onboard 24-bit Dual channel</li> </ul>
<b>USB</b>	<ul style="list-style-type: none"> <li>• 6* USB 2.0/1.1(4 distribute in back panel, 2 distribute in mid-board)</li> </ul>
<b>Special Features</b>	<ul style="list-style-type: none"> <li>• Support CPU Smart Fan</li> <li>• Support Watch dog Technology</li> <li>• Support GPIO Technology</li> <li>• Support VGA header</li> <li>• Support HDIM header</li> <li>• Support Power On board</li> <li>• Support Amplifier function(3W)</li> <li>• Support Slim Fan design</li> <li>• <a href="#">Support</a> Slim hard drive design</li> <li>• Support 1*RS422/RS485/RS232 COM port</li> <li>• Thunder Protection Function</li> <li>• All Solid Capacitor design</li> <li>• <a href="#">All Power Pack MOSFET design</a></li> </ul>
<b>Back Panel I / O</b>	<ul style="list-style-type: none"> <li>• 4* USB 2.0/1.1 ports</li> <li>• 2* RJ-45 port</li> <li>• 1* Print Port</li> <li>• 1* Line-out connector</li> <li>• 1 * VGA port</li> <li>• 1 * COM port (1*RS422/RS485/RS232 COM port)</li> <li>• 1* 12V DC in</li> </ul>
<b>Internal I / O</b>	<ul style="list-style-type: none"> <li>• 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports</li> <li>• 2*CPU / Chassis Fan connectors</li> <li>• 5*COM headers</li> <li>• 1*PS2/KB header</li> <li>• 1 *4-pin ATX 12V Power connector</li> <li>• 1 *4-pin SATA Power connector</li> <li>• 1 *15-pin VGA header</li> <li>• 1 *20-pin HDMI header</li> <li>• 1 *24-bit Dual Channel LVDS header</li> <li>• 1 *GPIO header</li> <li>• 1 *Mini PCI-e connector</li> <li>• 1 * M-SATA Connector</li> <li>• 1 * SATA+Power Connector(7+15Pin)(Option)</li> <li>• 1 * Audio header</li> <li>• 1 * Front panel header</li> <li>• 1* HDMI_SPDIFheader</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>• AMI 32MB DIP Flash ROM</li> </ul>
<b>Form Factor</b>	<ul style="list-style-type: none"> <li>• Thin mini ITX Form Factor(170mm X 170mm)</li> </ul>