
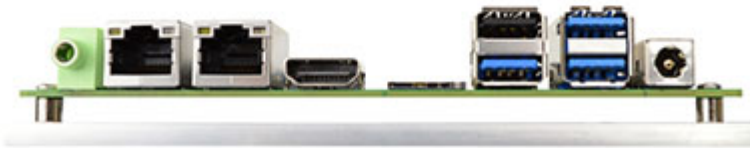


279.00 EUR  
incl. 19% VAT, plus [shipping](#)

- Apollo Lake SoC !
- 9,5W TDP !
- 3.5" form factor !
- 9-36V Input !

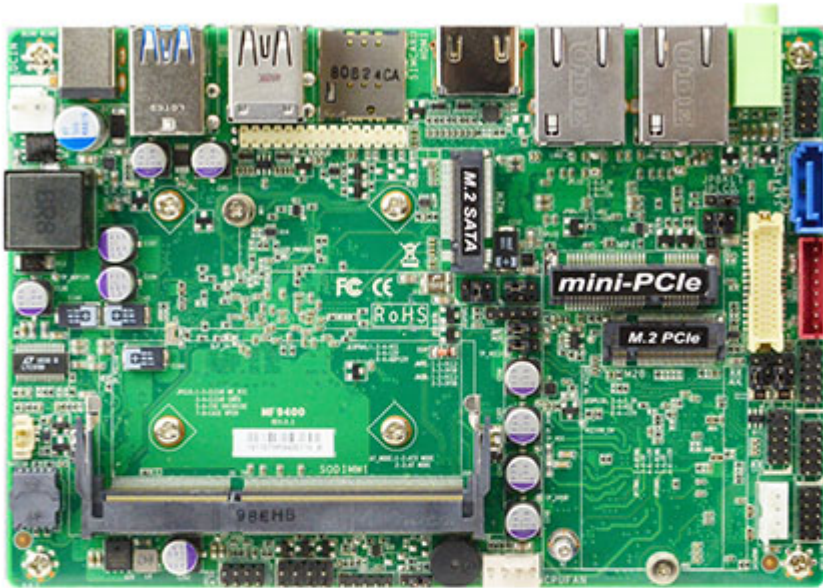

The JETWAY MF94 is 3.5" form factor board adopts the Intel® Apollo Lake SoC Processor. The board supports one SO-DIMM DDR3L 1866Mhz memory, up to 8GB. Featuring the integrated Intel® Gigabit Ethernet controller, the MF94 offers two 10/100/1000Base-TX Ethernet device for network transmission. One SATAIII (6Gb/s) interface and one M.2 M-key offer storage devices. Three USB3.1 Gen.1 ports, Three USB2.0 ports and two COM ports provide versatile expansion. The Mini-PCIe can support WIFI/3G/4G. The MF94 offers one HDMI port, one eDP port and one LVDS. Because of the above features, MF94 is suitable for Panel PC, IOT Solution applications.

- Intel® Apollo Lake SoC Processo
- 1\* DDR3L 1866MHz SO-DIMM up to 8 GB
- 2\* 10/100/1000 Base-TX Ethernet Ports
- 1\* HDMI, 1\* eDP, 1\* LVD
- 2\* COM, 3\* USB3.1 (Gen.1), 3\* USB2.0
- 1\* M.2 M-key 2242, 1\* M.2 B-key 3042
- 1\* Full size Mini-PCIe, 1\* SATA III (6Gb/s)
- Support 9~36V DC-in

Model	– MF94-90 (E3940 CPU_9.5W)
Form Factor	– 3.5" (5.8-in * 4.0-in, 148 * 102mm)
Processor System	– Intel® Apollo Lake E3940 SoC Processor (TDP 9.5W) – AMI Flash ROM BIOS

Expansion Slot	<ul style="list-style-type: none"> <li>- 1* M.2 M-key (2242) Support SATA interface</li> <li>- 1* M.2 B-key (3042) Support USB3.0 &amp; PCIe1 interface</li> <li>- 1* Full size Mini-PCIe Support USB2.0 &amp; PCIe1 interface</li> </ul>
Memory	- 1* SO-DIMM DDR3L 1866MHz Dual CH SDRAM non-ECC up to 8GB
Graphics	<ul style="list-style-type: none"> <li>- Intel® HD Graphics, shared memory</li> <li>- 1* eDP (Max Resolution: 4096x2304@60Hz)</li> <li>- 1* LVDS (Max Resolution: 1920 x 1080@60Hz)</li> <li>- 1* HDMI (Max Resolution: 3840x2160@ 30 Hz)</li> </ul>
Ethernet	- 2* Intel® GbE (2* i211AT)
Audio	- 6 channel HD audio: Realtek® ALC662VD
Storage	- 1* SATAIII
Rear I/O	<ul style="list-style-type: none"> <li>- 3* USB3.1 (Gen1)</li> <li>- 1* USB2.0</li> <li>- 1* HDMI</li> <li>- 2* RJ45</li> <li>- 1* SIM card slot</li> <li>- Line-Out</li> <li>- DC-in (9~36V)</li> </ul>
Internal Connector	<ul style="list-style-type: none"> <li>- 2* USB2.0</li> <li>- 1* eDP</li> <li>- 1* LVDS w/ Inverter</li> <li>- 1* RS232</li> <li>- 1* RS232/422/485</li> <li>- 1* SATAIII</li> <li>- 1* GPIO (8 bit)</li> <li>- 1* Audio Header</li> <li>- 1* SMBUS</li> <li>- 1* I2C</li> <li>- 1* CPU FAN</li> <li>- 1* TPM2.0 onboard (option)</li> </ul>
Watchdog Timer	<ul style="list-style-type: none"> <li>- From Super I/O to drag RESETCON#</li> <li>- 256 segments (10sec ~ 255min)</li> </ul>
Power	<p>DC-IN 9~36V</p> <p>AT/ATX mode Supported</p> <ul style="list-style-type: none"> <li>- AT: Directly PWR on as Power input ready</li> <li>- ATX: Press Button to PWR on after Power input ready</li> </ul>
Compliance	- CE, FCC, LVD, RoHS, REACH
Temperature	<ul style="list-style-type: none"> <li>- Operating:</li> <li>MF94-00: 0°C ~ 60°C</li> <li>MF94-90: -40°C ~ 85°C</li> <li>- Storage: -40°C ~ 85°C</li> </ul>