




259.00 EUR
incl. 19% VAT, plus [shipping](#)

- 16G Flash ROM !
- 2GB DDR3L !
- 6 core CPU !

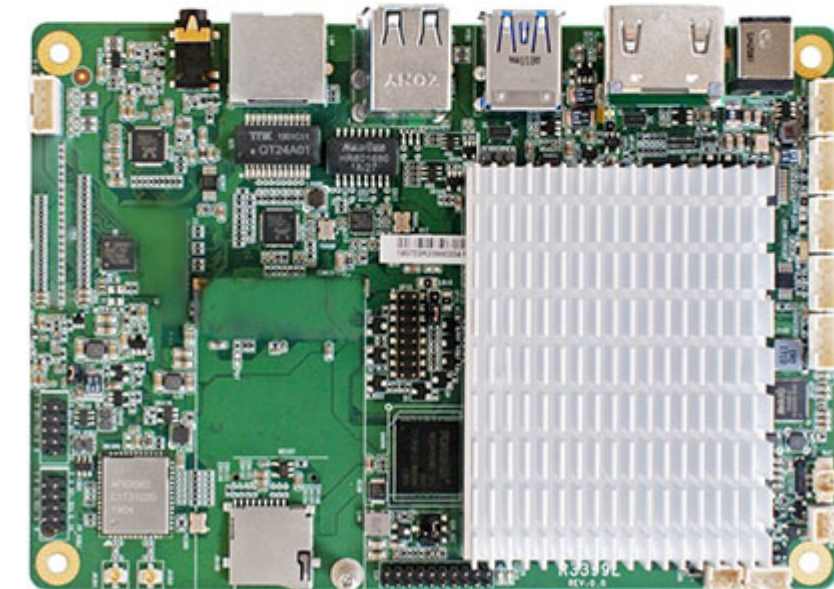

- Rockchip® ARM Cortex A72 (Dual Core) + Cortex A53 (Quad Core) RK3399 6 core 2.0GHz
- On board 1333/2GB DDR3L DRAM, On board 16G Flash ROM (Max. 64GB)
- Support WIFI and Blue Tooth
- 1* Realtek GbE, 3* UART, 1* RS232, 2* USB3.0 ■ 6* USB2.0, 1* OTG (Co-lay USB3.0), 1* HDMI2.0, 1* eDP
- Support 4K H.264/H.265 video decoding, up to 60fp 10bits coding
- Support 1080P H.264 format video encoding
- 1* Micro SD Max 256GB
- Support Android 7.1, Debian9.0

Model	
Model	– JR3399XL-2C
Part Number	– JR3399XL-2C
Form Factor	
Dimensions	– 102 * 146mm
Processor System	

Processor/CPU	<ul style="list-style-type: none"> - Rockchip® ARM Cortex A72 (Dual Core) + Cortex A53 (Quad Core) 2.0GHz - Rockchip® RK808-D PMU
Memory	
DRAM	- Onboard DDR3L 1333MHz 2GB
Expansion Slot	
Dimensions	<ul style="list-style-type: none"> - 1* Micro SD - 1* SIM Card Socket
Graphics	
Graphics	<ul style="list-style-type: none"> - Mali T860MP4 GPU, OpenGL ES1.1/2.0/3.0, OpenCL1.2, DirectX11.1 - 1* HDMI (Max Resolution: 3840x2160@60Hz) - 1* eDP (Max Resolution: 4096x2304@60Hz) - Support Dual Displays
Ethernet	
Ethernet	- 1* Realtek RTL8211E GbE
Wifi	- 1* AMPAK AP6356S 802.11 a/b/g/n/ac 2.4/5G WIFI and BT-V4.1
Audio	
Audio	- 2 channel HD audio: ALC5640
Storage	
Storage	- 16GB Flash ROM (Max 64GB)
I/O Port	
Rear I/O	<ul style="list-style-type: none"> - 1* DC Jack (12V) - 2* USB3.0 (Co-lay OTG) - 2* USB2.0 - 1* HDMI2.0 - 1* AUDIO(Line-out +MIC) - 1* RJ45
Internal I/O	<ul style="list-style-type: none"> - 4* USB2.0 - 3* UART, 1* RS232, 1* Debug - 1* eDP - 1* Speaker (3W AMP) - 1* GPIO (8 bit) - 1* I2C - 1* Power BT (Header) - 1* Reset BT (Header) - 1* CPU FAN (Header)
Watchdog Timer	
Watchdog Timer	<ul style="list-style-type: none"> - From Super I/O to drag RESETCON# - 256 segments(0~255 sec)
Power	
Power	12V DC-in (PWR Con) <ul style="list-style-type: none"> - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Compliance	
Certifications	- CE, FCC, LVD, RoHS, REACH
Environment	
Temperature	<ul style="list-style-type: none"> - Operating: -10°C ~ 60°C - Storage: -20°C ~ 70°C