


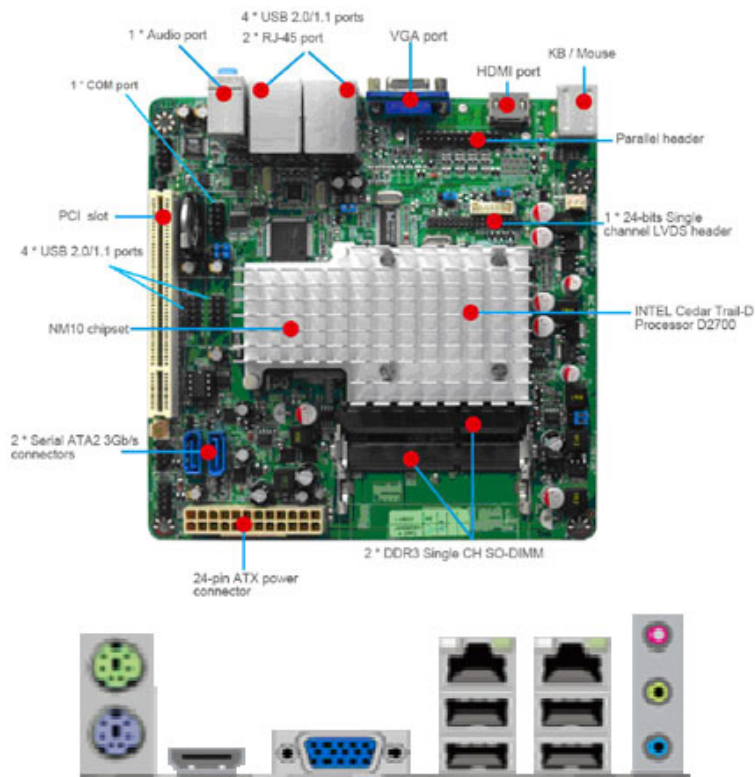

98.00 EUR

incl. 19% VAT, plus shipping

Remnant with I/O shield. 2 years warranty.

- INTEL® Cedar Trail-D Processor D2700 + NM10 Chipset
- Support 2 * DDR3 800/1067MHz Single CH up to 4GB
- Support DirectX 9 Graphics
- Support 2 * Serial ATAII (3Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 1 * 24 bits Single Channel LVDS header
- Supports 2 * Realtek RT8111EVL Gigabit LAN
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

• **CPU**

• **Chipset**

• **Memory**

• **Expansion Slots**

• **Storage**

• **Audio**

• **Ethernet LAN**

- INTEL® Cedar Trail-D Processor D2700 CPU

- INTEL®NM10 Express chipset

- 2 * DDR3 1067MHz Single CH SO-DIMM up to 4GB

- 1 * PCI slot

- 2 * Serial ATA2 3Gb/s connectors

- Realtek ALC662 6-Channel HD Audio

- 2 * RTL8111EVL PCI-E Gigabit LAN

- **LVDS**
- **USB**
- **Special Features**
- **Rear Panel I/O**
 - Onboard 24-bits single channel connector
 - Embedded 8 * USB 2.0/1.1
 - Support ACPI S3
 - Support CPU Smart FAN
 - Support Watch Dog
 - 4 * USB 2.0/1.1 ports
 - 1 * PS/2 Mouse & 1 * Keyboard connector
 - 2 * RJ-45 port
 - 3 * Audio I/O ports (Line-in, MIC and Line-out)
 - 1 * VGA port
 - 1 * HDMI port
- **Internal I/O**
 - 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports
 - 2 * NB / Chassis Fan connectors;
 - 1 * 24-pin ATX Power connector
 - 1 * LVDS header/1 * Inverter header
 - 1 * AUDIO header
 - 1* RS232 header
 - 1 * Parallel header
- **BIOS**
- **Functional**
 - AMI 16MB DIP Flash ROM
 - ATM, Automation, Medical Equipment, Digital Signage, Networking, POS, General Application, Transportation
- **Packing**
 - Color Box Dimension : 200(W) x 200(D) x 70(H)mm
- **Certificate**
- **Temperature**
 - CE, FCC, RoHS
 - Operating within 0~40 centigrade (**Suggest to use system FAN**)
 - Storage within -20-85 centigrade
- **Form Factor**
 - Mini ITX Form Factor(17cmx17cm)