




CARTFT.COM
Shop for mobile
PC- and GPU-Solutions

JETWAY ATX-ARS1-W880 ATX Motherboard (Intel W880 Chipset, Socket LGA1851, 3x 2.5GbE, 4x Display)

[<http://www.cartft.com/catalog/il/3927>]

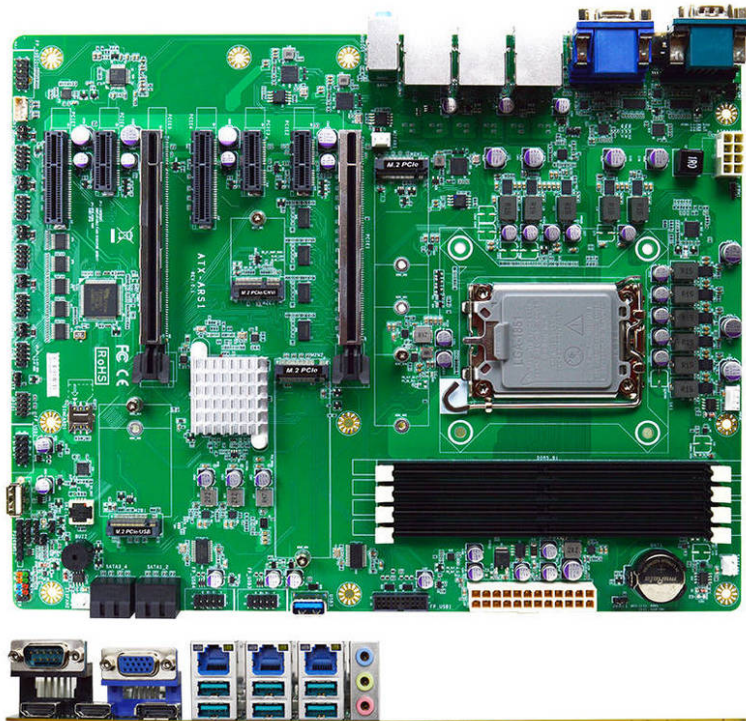

0.00 EUR

incl. 19% VAT, plus shipping

- **Core Ultra Series 2 !**
- **W880 Chipsatz !**
- **3x 2.5GbE LAN !**
- **4x DDR5 ECC bis 256GB !**

- Powered by Intel® Core® Ultra processors (Arrow Lake-S) with Intel® W880 chipset
- 4 x DDR5 6400MT/s Dual Channel CU-DIMM, up to 256GB, ECC supported
- Triple Intel® 2.5GbE Ethernet ports for high-speed networking
- 4 x SATA III with RAID 0/1/5/10 and 2 x M.2 M-Key for NVMe SSDs
- Extensive expansion with 2 x PCIe Gen 5 x16, 2 x PCIe Gen 4 x4, 3 x PCIe Gen 4 x1, plus M.2 B-Key and E-Key
- Supports four displays via 2 x HDMI® 2.1 TMDS, 1 x DP and 1 x VGA
- Comprehensive I/O: 9 x USB 3.2, 7 x USB 2.0, 6 x COM and 1 x 8-Bit GPIO
- Intel® PTT (Integrated fTPM), TPM 2.0 (dTPM) optional

SYSTEM

MB FORM FACTOR

ATX

CPU

Intel® LGA1851 Socket, Processor Arrow Lake-S (MAX. TDP 125W)

CHIPSET

Intel® W880

MEMORY

4 x DDR5 6400MT/s, Dual Channel CU-DIMM, up to 256GB, ECC Supported

BIOS

UEFI

WAKE ON LAN

Yes

WATCHDOG TIMER

255 Levels

SECURITY

Intel® PTT (Integrated fTPM)
TPM2.0 (dTPM, Optional)

RTC BATTERY

Lithium Battery

DIMENSION (W X D)	305.0 (W) x 244.0 (D) mm (12" x 9.6")
OS SUPPORT	Windows® 11 (64bit) Linux
POWER	
POWER REQUIREMENT	ATX Power Supply
POWER ON MODE	ATX (Default) Mode
CONNECTOR	Internal 24+8-pin ATX Header
DISPLAY	
GPU	Intel® Graphics
DP	1 x DP1.4a (Max Resolution: 4096 x 2160@60Hz)
HDMI®	2 x HDMI® 2.1 TMDs (Max Resolution: 3840 x 2160@60Hz)
VGA	1 x VGA (Max Resolution: 1920 x 1080 @60Hz)
MULTIPLE DISPLAY	Support 4 Displays
AUDIO	
CODEC	Realtek codec
Line-in	1 x Audio Jack for Line-in
Line-out	1 x Audio Jack for Line-out
MIC-in	1 x Audio Jack for MIC-in
AMPLIFIER	3W
LAN	
ETHERNET	1 x RJ45 for Intel® I226-LM 2.5GbE 2 x RJ45 for Intel® I226-V 2.5GbE
USB PORT	
USB	6 x USB 3.2 Gen 2 Internal Header for 2 x USB 3.2 Gen 1 Internal Header for 6 x USB 2.0 Internal USB Type A (Vertical) for 1 x USB 3.2 Gen 1x1 Internal USB Type A (Vertical) for 1 x USB 2.0
SERIAL PORT	
COM	1 x DB-9 for RS-232/422/485 Internal Header for 5 x RS-232
INTERNAL I/O	
GPIO	8-Bit
SMBUS	Yes
I2C	Yes
FAN	1 x CPU Fan Header (Smart Fan) 2 x System Fan Header
FRONT PANEL	HDD Active LED Power LED Power On/Off Reset
ADDITIONAL	1 x Chassis intrusion 1 x AT/ATX Mode Selection
STORAGE	

SATA	4 x SATA III
RAID	Intel® VMD RAID 0, 1 & SATA RAID 0, 1, 5, 10
EXPANSION	
M.2	1 x M-Key 2242/2260/2280/22110 (PCIe Gen 5x4) support NVMe 1 x M-key 2280 (PCIe Gen 4 x4) support NVMe 1 x E-Key 2230 (USB 2.0/PCIe Gen 3 x1) support CNVio 1 x B-Key 3042/3052 (USB3.1/USB2.0/PCIe Gen 3 x1) for 4G/5G module
PCIe	2 x PCIe Gen 5 x16 slots (1x PCIe Gen 5x16 or 2 x PCIe Gen 5 x8) 2 x PCIe Gen 4 x4 3 x PCIe Gen 4 x1 1 x Nano SIM Card Slot
SIM	
OTHERs	
OTHER	1 x PS/2
ENVIRONMENT & CERTIFICATION	
SHOCK	15G, 11ms duration
VIBRATION	1 Grms/ 5~ 500Hz/ Operation
OPERATING TEMPERATURE	-20°C ~ 60°C (-4°F ~ 140°F)
STORAGE TEMPERATURE	-20°C ~ 85°C (-4°F ~ 185°F)
OPERATING HUMIDITY	10 ~ 90% Relative Humidity, Non-condensing
STORAGE HUMIDITY	10 ~ 90% @40°C, Non-condensing
CERTIFICATION	CE/FCC Class A
	LVD
ESG DECLARATION	EU RoHS
	China RoHS
	WEEE
	REACH
	TSCA Declaration
	PRO65 Declaration
	CMRT Report