

RuggedPad – Install modem card



You need 2 plastic cards with approx. 0.8mm thickness and a size of 3x5 cm and a screw driver.




Insert the first card on height of the "Insert"-Button between casing and keyboard.






Then remove the keyboard with help of the second card.

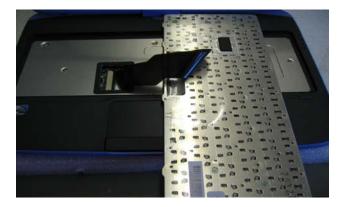



Be careful with the flat cable !

Now remove the cable :



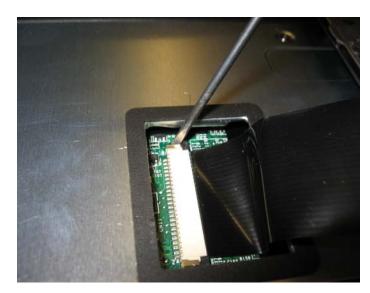


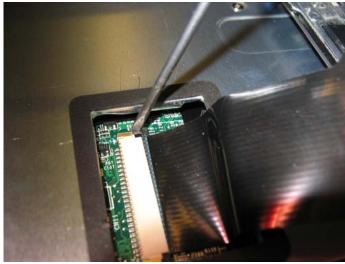

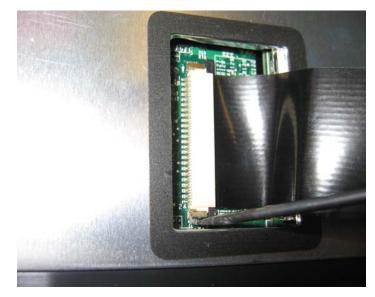





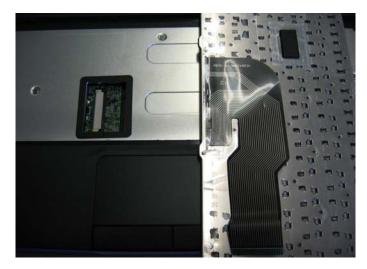





















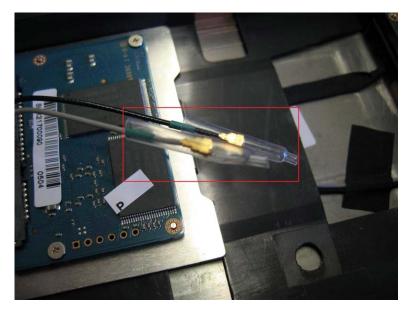



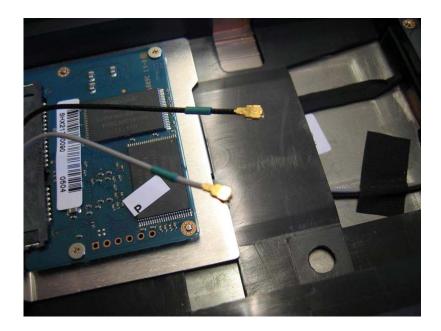














Now you can install the keyboard back again.

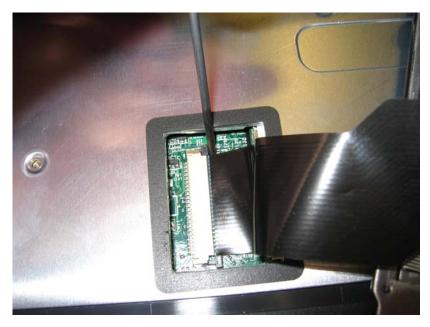













Author: Jens Hankiewicz – CarTFT.com Date : 23.07.2012