
64.00 EUR incl. 19% VAT, plus shipping

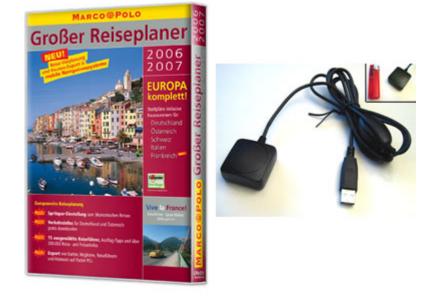

This gps mouse has an integrated antenna. The current supply takes place over the USB-connecton of the computer You only have to install a GPS-capable software for using this product to detect your position

This GPS-Receiver has the following technical details :

Specifications	
Receiver	I racking up to 12 satellites L1, 1575.42 MHz, C/A code
Accuracy	Position: 2DRMS approximately 2m, WAAS support
	Velocity: 0.1 m/s without SA imposed
	Time: ±1µs
Acquisition Time	Cold Start: 45s (Average)
	Warm Start: 35s (Average)
	Hot Start: 2s (Minimum)
Sensitivity	Acquisition: -139dBm
	Tracking: -152dBm
Dynamics	Max Altitude: 18000m
	Max Velocity: 500m/s
	Max Acceleration: ±4g
Navigation Update Rate	Once per second
Serial Port	TTL, RS232
Baud Rate	4800 bps (Optional 9600,19300,38400 bps)
Output Message	NMEA0283 V2.2 GGA, GSV, GSA, RMC (optional VTG, GLL)
Datum	WGS 84
Power Supply	DC 5V ±5%
Power Consumption	Typical 80mA @5V
LED Indicator	Power On/Off
	Navigation
Operating Temperature	-40° ~ +85° C
Storage Temperature	-40° ~ +100° C
Humidity	5%~95%
Antenna Type	Built-in patch antenna

The GPS-Receiver is compatible to the following operating systems : - Win 98/Me/W2K/XP/MAC/Linux

